

MODEL # L-009

Construction: All brass components, schedule 40 housing.

Lens: Tempered glass, stepped to prevent "pooling" of water on lens.

Mounting: In ground fixture.

Wiring: Silicone-filled wire nuts are provided for in-ground splicing outside of fixture.

Finish: Unfinished. Fixture will weather to a natural patina finish.


Accessory: BGS-1 Brass glare shield.

Voltage: 12 volts.

Lamp: MR-16 bi-pin halogen, 50 watt maximum.

| | | |
|--------|-------------------|--------------|
| JR-10 | 10 watt medium | (24 degrees) |
| ESX | 20 watt spot | (12 degrees) |
| BBF | 20 watt medium | (24 degrees) |
| BAB | 20 watt flood | (36 degrees) |
| BAB/60 | 20 watt superwide | (60 degrees) |
| FMT | 35 watt spot | (12 degrees) |
| FMV | 35 watt medium | (24 degrees) |
| FMW | 35 watt flood | (36 degrees) |
| FMW/60 | 35 watt superwide | (60 degrees) |
| EXT | 50 watt spot | (12 degrees) |
| EXZ | 50 watt medium | (24 degrees) |
| EXN | 50 watt flood | (36 degrees) |
| FNV | 50 watt superwide | (60 degrees) |

See separate MR-16 lamp sheet for data.

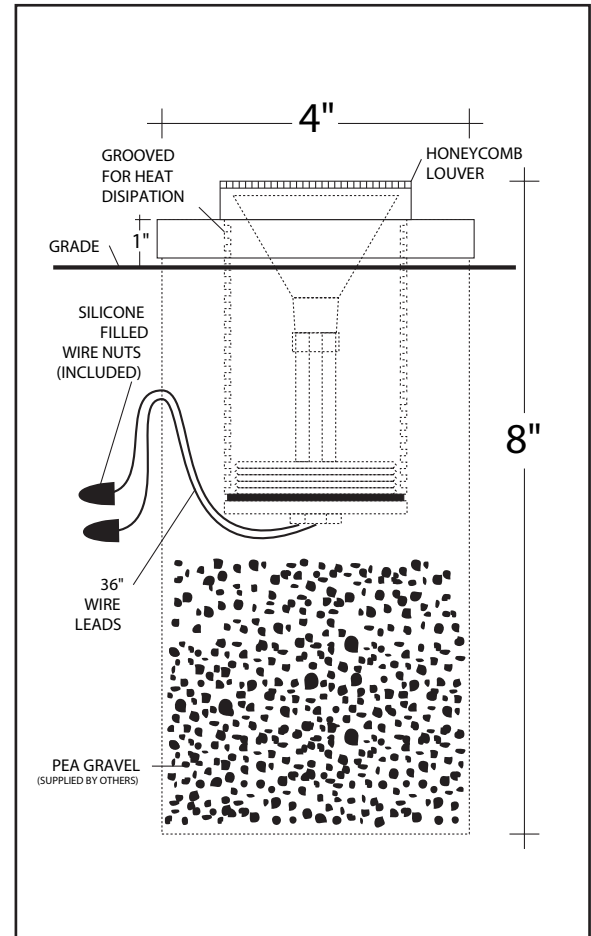

Ordering Example

L - 009 — B A B — B G S - 1
 Fixture Model Lamp Type Accessory



Seashore Lighting • 941-753-0349 • www.SeashoreLighting.com